RV®

Specialized grease for
Precision Reduction Gear RV™

RV® GREASE LB00




New

RV™ Grease, which was developed to fully maximize the performance of the precision reduction gear RV™ is now available in a small 270 g pouch

New features ensure greater satisfaction

- Prevents spillage in work environment due to leaks or tears
- No need to refill the grease
- More economical—disposable size eliminates waste
- Easier than existing grease guns to dispense; makes work more efficient and reduces the worker's burden

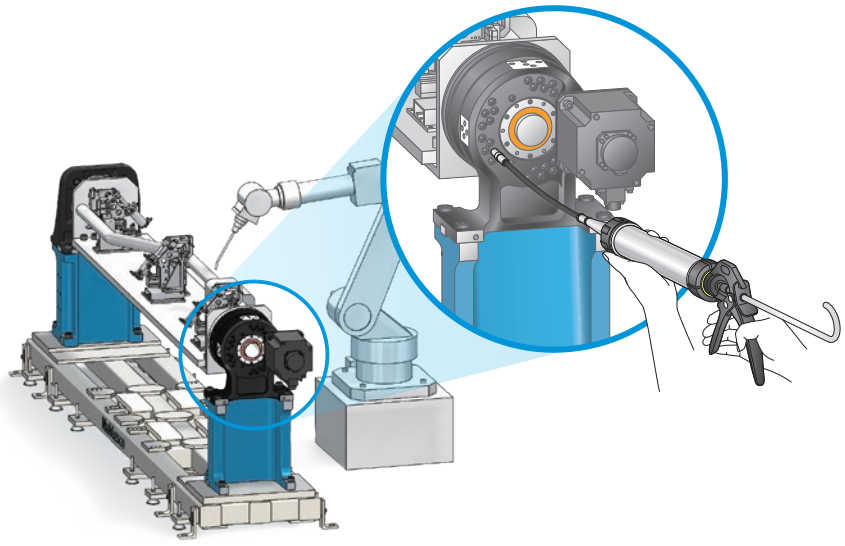

Nabtesco®

Specialized grease for Precision Reduction Gear RV™

RV® GREASE LB00

RV GREASE LB00 has high-lubricating performance over a wide operating condition range including temperature, speed and load. This has been achieved by applying special additives and high-grade base oil.

Compared to the existing grease, RV GREASE LB00 has excellent low temperature performance, reducing input torque


● Pouch type



Sold in sets of 10

Product appearance: pouch, 270 g

Special starter kit (sold separately)

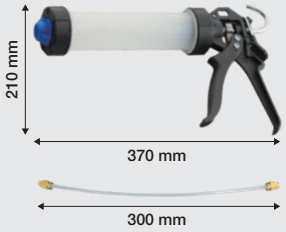

Contents of set: grease gun, hose

● Can type



Product appearance:
Pail can (16 kg), drum (170 kg)

Test items		Test method	RV GREASE LB00
Thickener		–	Lithium soap
Base oil		–	Synthetic hydrocarbon oil, Mineral oil
Base oil kinematic viscosity (40°C), mm²/s		JIS K 2220 23. ASTM D 445	71.8
Appearance		–	Yellowish brown, buttery
Worked penetration		JIS K 2220 7. ASTM D 217	410
Dropping point, °C		JIS K 2220 8. ASTM D 566	188
Oxidation stability (99°C, 100 h), kPa		JIS K 2220 12. ASTM D 942	10
Working stability		JIS K 2220 15. FTMS 791C-313	427
Low-temperature torque (-30°C), mNm	Starting torque	JIS K 2220 18. ASTM D 1478-63	140
	Running torque		30
Four-ball EP, N	L.N.S.L. W.P. L.W.I	ASTM D 2596	1569 3089 647

Note: The numbers shown above are typical property values, and are not guaranteed.

Nabtesco®
Nabtesco Corporation
https://precision.nabtesco.com/

- Nabtesco and RV are registered trademarks or trademarks of Nabtesco Corporation.
- Specifications are subject to change without notice.
- Unauthorized reprinting, reproduction, copying, or translation of this catalog in whole or in part is strictly prohibited.

©2019 Nabtesco Corporation All rights reserved

CAT. 200401-Rev. 001 (Issued on April 1, 2020)

Europe and Africa
Nabtesco Precision Europe GmbH (Düsseldorf, Germany)
TEL: +49-211-173790 FAX: +49-211-364677 E-MAIL: info@nabtesco.de

North and South America
Nabtesco Motion Control Inc. (MI, USA)
TEL: +1-248-553-3020 FAX: +1-248-553-3070 E-MAIL: engineer@nabtescomotioncontrol.com

India
Nabtesco India Private Limited (Bangalore, India)
TEL: +91-80-4123-4901 FAX: +91-80-4123-4903 E-MAIL: Nti_pn@nabtesco.co.in

Asia and others
Nabtesco Corporation (Japan)
Nagoya Office
TEL: +81-52-582-2981 FAX: +81-52-582-2987

Customer Support Center
TEL: +81-59-237-4672 FAX: +81-59-237-4697

E-MAIL: P_Information@nabtesco.com

JAB CM009 JQA-EM7212 ISO 14001 ISO 9001 JQA-1190 JQA-OH0278 ISO 45001